



**Model Name**


**RP654K**

**Unique selling point**


- \* IR 20-points Multi-touch (up to 20 points)
- \* Touch Driver Free/ Multi-Platform Support
- \* Build-in Annotation EZWrite SW (10 points & NFC Pen )
- \* Anti-Glare/Low Blue Light/Flicker free/Anti-bacteria glass
- \* OSD Menu with Touch/NFC

<b>Panel</b>	Screen Diagonal	65"	
	Backlight	DLED	
	Resolution	3840 x 2160	
	Aspect Ratio	16 : 9	
	Brightness	350nits	
	Contrast Ratio	1200:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	8ms	
	Panel bit	10-bit	
	Light life	30,000hrs	
	Orientation	Landscape	
<b>Touch solution</b>	Touch tech.	IR	
	Number of touches	10 points writing/ 20 points touching	
	Touch interface	USB	
	Resolution	32767 x 32767	
<b>Cover glass</b>	Thickness	Tempered, 4 mm	
	Hardness	7H	
	AG coating	88%	
<b>Speaker</b>	Built-in speaker	16W x 2	
<b>Interface</b>	Input	Power (AC) Inlet	x 1
		Audio line-in	x 1
		Composite video	x 1
		Composite audio	No
		Component video (RCA)	No
		D-sub	x 1
		Type A HDMI	x 3 (1.4 x 2, 2.0 x 1)
		Type A (USB Playback)	x 6 ( USB 2.0 x 5 + USB 3.0 x 1)
		DisplayPort	x 1
		RS232	x 1
		S-video	No
		SPDIF	No
		LAN	x1
	Output	Microphone	No
		RS232	No
		Type A HDMI	x 1
		Line out (Audio out, 3.5mm)	x 1
		COAX	x 1
	Others	NFC Reader/Writer	Yes
		IR receiver	x 1
<b>Mechanical</b>	Dimension (WxHxD) (Without Packing / With Packing)	1521 * 967 * 128 mm/1720 * 1113 * 280 mm	
	Net Weight/Gross Weight	49 / 61	
<b>Power</b>	Power supply	AC100 to 240V, 50 to 60 Hz	
	Power consumption	300W	
<b>OSD</b>	On-Screen Display Languages	EN / EF / SP / EP / CN / TC / GM / DT / PL / RS / CZ / DN / SW / IT / RM / FN / NG / GK / TK / AB / JP (21 Languages)	
<b>Accessories</b>	<b>Standard</b>	Remote Control w/ Battery	x 1
		Power Cord (by region)	x 4
		Touch pen	x 2
		Quick Start Guide	x 1
		Touch Cable (USB to USB)	x 1
		HDMI cable	NA
		VGA(D-sub 15pin) Cable	x 1

# Input/output terminals

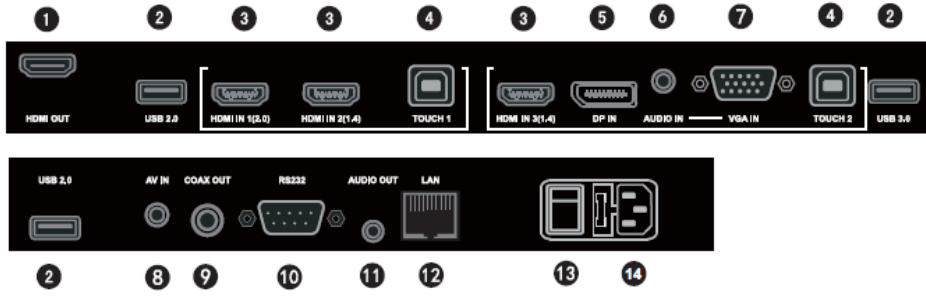

## Wallmount

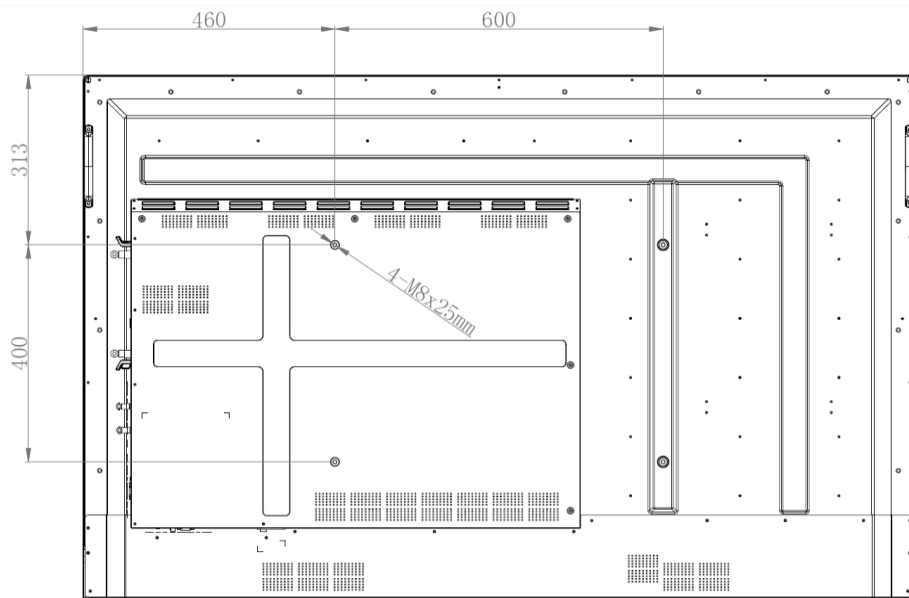

## Dimension

